



R. Mitch Avalon
 PUBLIC WORKS DIRECTOR
 2-28-02


PLANS APPROVAL DATE
 The County of Contra Costa or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

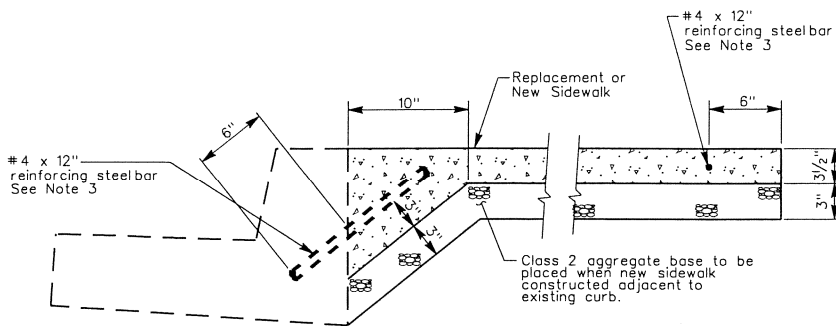

SECTION A-A

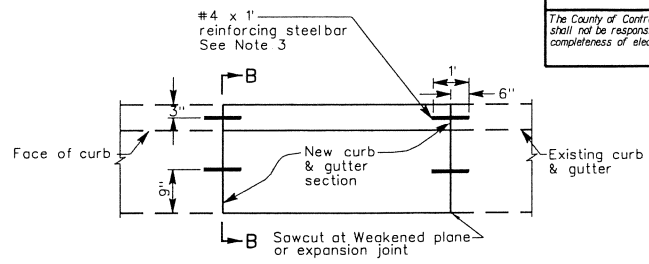


DOWELING LOCATION FOR NEW CURB ADJACENT TO EXISTING CURB

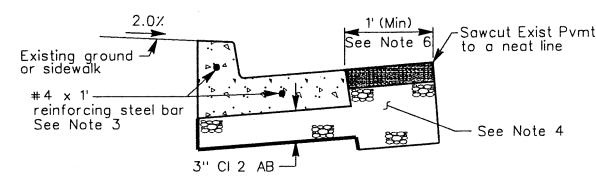

SECTION B-B


NOTES:

1. All curb, gutter, and sidewalk shall conform to Standard Plans CA70i and CA71i.
2. Concrete removed for replacement construction shall be sawcut to a neat line at the weakened plane joint or scoremark nearest to the full width of replacement.
3. Dowels shall be placed in a 3/4 inch diameter drilled hole filled with 1:1 sand cement grout.
4. Asphalt concrete and aggregate base shall be placed to the thickness as required by the Public Works Department. Minimum section shall be 0.5' AC for curb replacement.
5. Paving at the gutter lip shall conform to "Detail A" of Standard Plan CA70i. When the street slopes away from the curb, the paving shall match the gutter lip.
6. The asphalt concrete conform for new or replacement curb shall be a minimum width of 1' measured from new gutter lip or face of "B" type curb or 1' inside existing edge of pavement whichever is greater.

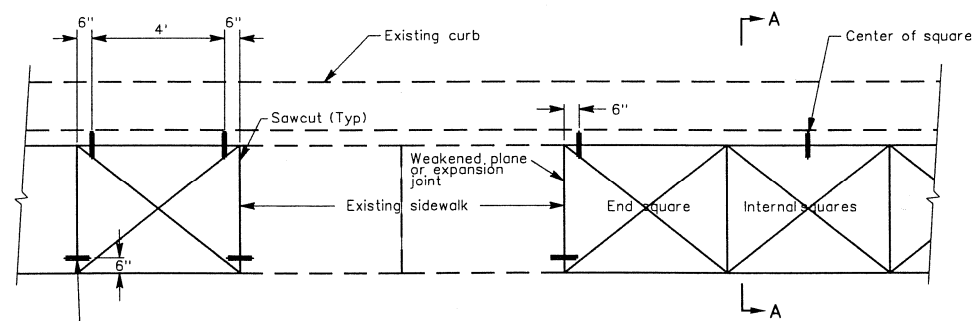

REPLACEMENT OF ONE SQUARE

REPLACEMENT OF TWO OR MORE SQUARES

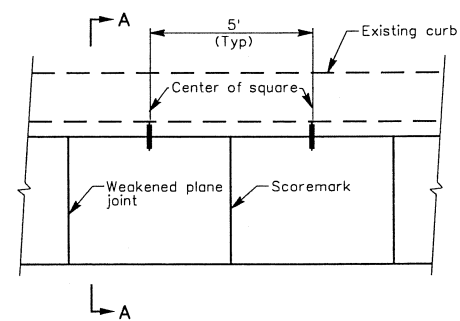

DOWEL LOCATIONS FOR NEW SIDEWALK ADJACENT TO EXISTING CURB

LOCATIONS FOR REPLACEMENT SIDEWALK

COUNTY OF CONTRA COSTA
 PUBLIC WORKS DEPARTMENT
 MARTINEZ, CALIFORNIA
 STANDARD PLAN

DOWELING DETAILS FOR CURB AND SIDEWALK

2-02	Supersedes Standard Plan CA74 dated 11-99	P.W.
NO.	DATE	REVISION DESCRIPTION

SCALE: NO SCALE
 DATE: 2-02
 DRAWN BY: H. HUSSEY
 PLAN NO. CA74i
 CHECKED BY: M. HOLLINGSWORTH